


Technical Features



Symbolic Picture

Cabinet Type	Stand (ST)		
Top Light	Candle (vertical, 3 colours) or Classic (vertical, 2 colours)		
Topper	With perspex plate		
Monitor	2 TFT 19" (4:3) or 1 TFT 19" (4:3) and an individual perspex plate		
Cash Handling			
Bill Validator	JCM UBA-1x-SS, MEI SCNxx (Cashflow)		
Bill Dispenser	JCM UBA-10-SH2-RC		
Coin Acceptor	NRI G40, Azkoyen X6-xx		
Hopper	Up to 3: Universal MK4, Azkoyen U II Plus		
Ticket Printer	Custom TG2480, Ithaca EPIC 880, Ithaca EPIC 950, FutureLogic GEN 2, FutureLogic GEN 5		
Player Tracking	Available and customisable		
Gaming Board	Platform	Abbr.	Game Content
	COOLFIRE™ I	CF1	
	COOLFIRE™ I+	CF1P	
	COOLFIRE™ I+ s	CF1PS	
	COOLFIRE™ II	CF2	
	COOLFIRE™ II-s	CF2S	
	FireFox	FF	NOVO LINE™, Pro
	FireFox II	FF2	Impera, NOVO LINE™, Octavian, Pro
Player Panel	With buttons		
Sound	2 full range loudspeakers and 1 subwoofer		

Technical Data

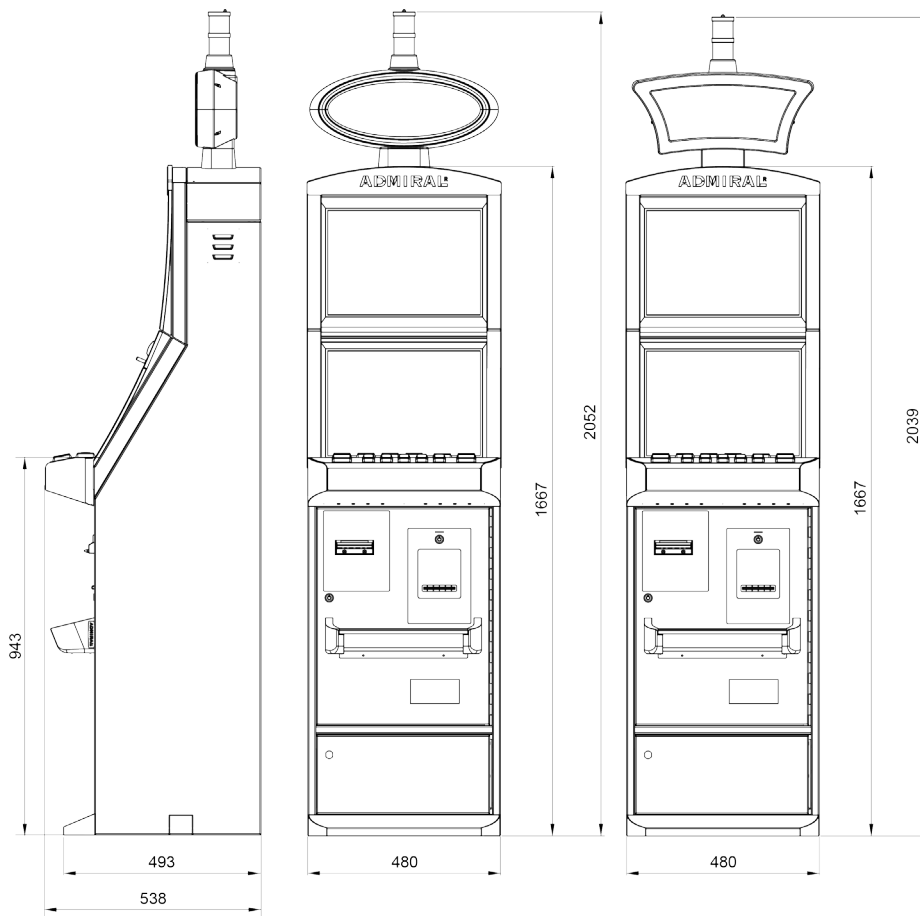

Machine Type	FV761
Dimensions	Width: 480 mm Depth: 538 mm
With Topper B15	Height: 2052 mm
With Topper B52	Height: 2039 mm
Without Topper	Height: 1667 mm
Power Supply	230 V / 50 Hz / 1.6 A
Power Consumption	250 W
Ambient Temperature	10 – 35° C
Ambient Humidity	30 – 80 % (non-condensing)

General Disclaimer

All technical information contained in this data sheet has been developed and compiled with great care and is subject to change without notice. NOVOMATIC Gaming Industries GmbH reserves the right to make changes to this data sheet at any time and gives no guarantee and accepts no legal responsibility (neither as a liability nor in any other way) for any errors and consequences that may arise from incorrect statements or incorrect use. © NOVOMATIC 11 2017

NOVOMATIC Gaming Industries GmbH • Wiener Strasse 158 • 2352 Gumpoldskirchen • Austria • Europe
Tel.: +43 2252 606 • Fax: +43 2252 607 001 • info@novomatic.com • www.novomatic.com

